
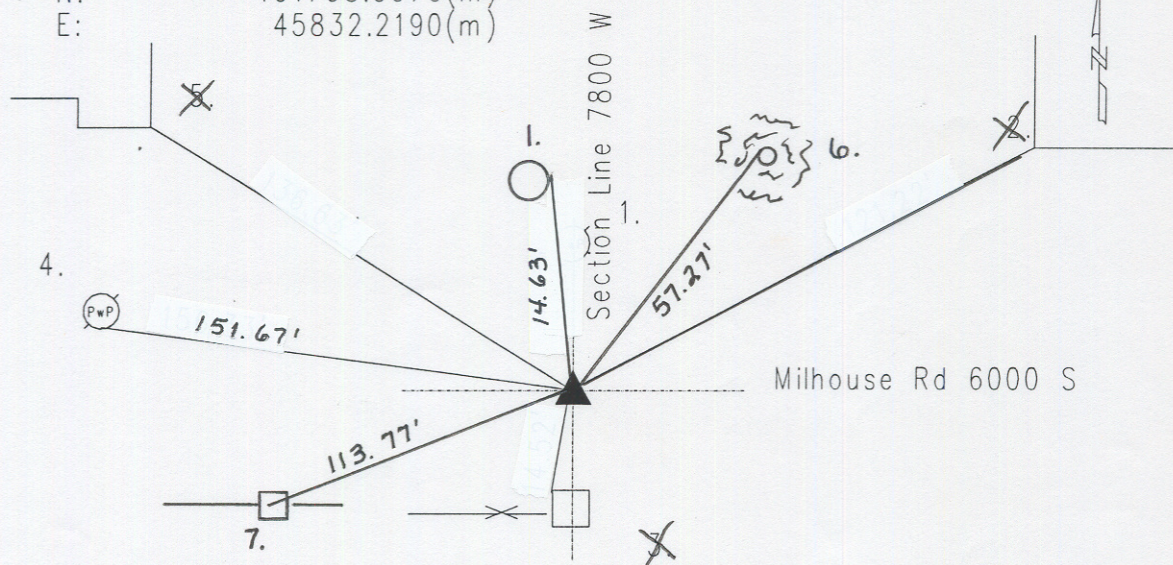


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 10 TOWNSHIP 14 RANGE 2  
DATE: 2-25-02 1-10-07  
PARTY CHIEF: Kiste Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison FD  
METHOD OF ESTABLISHMENT: County: 8-18-98

IN. S.P.C. E ZONE NAD '83  
NAME: 14021002  
N: 491798.0070(m)  
E: 45832.2190(m)

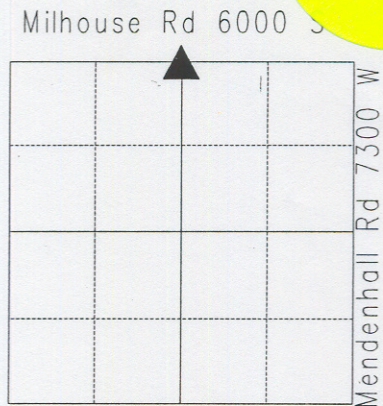

Original post set 1820 by Laughlin with witnesses: 12" beech N 87 W 20 links; 4" dogwood N 89 E 11 links per Marion County Atlas pg. 1. Coyner 9-26-1898 called a stone with no witness per Decatur Township Legal Survey Book pg. 36. Scherschel 5-15-63 called stone found 18" dn. Elvan 7-12-73 called 2"x2" stake and a 1/2" rebar over a stone 24" down. Howe 11-13-74 called tacked hub. Wilcoxon 7-2-85 called a hub at surface. Kiste 5-26-90 called 3/8" rebar fd at surface. Wilcoxon 12-22-94 called a 3/8" rebar fd at surface. Excavated by Wilcoxon 8-18-98 and rebar was found 0.8' W of a stone found 24" down. Harrison set. 8-18-98. Re-tied 2-25-02 by Kiste.

14021002

| REF. | DISTANCE | DESCRIPTION   |
|------|----------|---|
| 1.   | 14.63'   | PK nail w/plastic washer S PwP#31-711 Z 12" up          |
| 2.   | 121.22'  | SW corner of brick ADDRESS 7804                         |
| 3.   | 14.52'   | PK nail NW fence post 12" up                            |
| 4.   | 151.67'  | Small PK nail S PwP#37-711 Y 3" up.                     |
| 5.   | 136.63'  | SE corner of garage brick                               |
| 6.   | 57.27'   | Boat spike W 24" ash in spur root                       |
| 7.   | 113.77'  | Mag nail w/bw Top wooden plank in steel guard rail post |
|      |          |   |
|      |          |   |
|      |          |   |